

EXTERNAL SPIRALS



External Spiral



Ballustrading



External Galvanized


Standard Specifications

Formula for certifiers required minimum is as follows; $7/10$ of width between inside of pole and inside of balustrade= X . X from inside of pole should measure between 194mm and 204mm (shown as Y). Rises should be between 160mm - 220mm (190mm preferred maximum).

Construction The stair is spiral with timber (Pine or Kwila) treads on a 50 x 25 x 3 RHS supporting arm, or your choice of 3mm smooth plate or 3mm checker plate treads. The steel plated treads are folded front and back for extra strength and appearance. These folds can be evenly folded or tapered along the treads. The centre pole is 114.3mm x 4.5mm diameter tube. Top rail on balustrading is 33.7mm x 3.2mm tube with 12mm square bars at max 125 centres. The staircase is a one-piece construction, fully welded in our workshop and is all custom built to your requirements. The balustrade is site fitted. This makes for a much more sound finish and does not rattle or shake. Landings are an optional extra and are not usually required.

Surface Treatment Internal stairs are supplied prime painted and ready for topcoat. Timber treads are shaped and sanded ready for painting or staining. External stairs are hot dip galvanised and site welds are touched up with highest quality cold Galvit E90.

Installation Installation is included in price and generally takes about 5-6 hours. As there is the need for some site welding, affected areas are covered up and protected from any damage. Site welding eliminates any need for bolts and screws which can work loose with use.

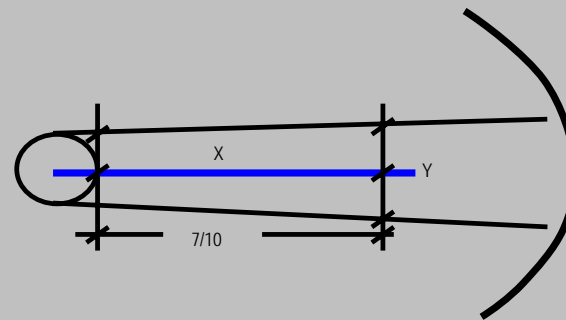

© Uprite Steel Fabricators 2009



Uprite Steel Fabricators and Spiral Stairs
Specialises In Spiral Staircases & Handrails.

We have a background of over 30 years in Structural Steel and Spiral Stairs.

Our extensive experience and overview ensures that we design and install Spiral Stairs with attention to detail for the residential, commercial and the industrial sectors.

Contact us today on 07 3808 6588 to see how we can be of service to you.



UPRITE STEEL FABRICATORS PTY LTD
Specialists in Spiral Staircases

BILL PERSKE


Phone 07 3808 6588
Fax 07 3208 0405
Mobile: 0408 987 317
12 Delton Street,
Kington. Q. 4114
Web: www.upritesteel.com
Email: info@upritesteel.com

INTERNAL SPIRALS


www.upritesteel.com



BALUSTRADING




FIXING



KWILA TIMBER TREADS



BALUSTRADING



STAINLESS HANDRAIL



INTERNAL FINISH



BOTTOM FIXING PLATE



SPIRAL TURN



BALUSTRADING



PINE TREAD SPIRAL




45 VIEW STRINGER



MONO STRINGER



INTERNAL SPIRAL




TREAD FIXING




METAL TREAD SPIRAL



KWILA TREAD SPIRAL



TREAD BRACKET

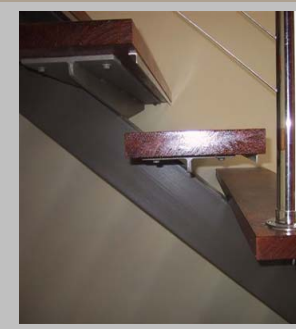

TREAD END VIEW